

RESOLUTION NO. 81-2005

Offered by: All of Council


A RESOLUTION APPROVING CHANGE ORDER NOS. 8 AND 9 FOR THE BRECKSVILLE ROAD RECONSTRUCTION PROJECT

BE IT RESOLVED by the Council of the Village of Richfield, Summit County, State of Ohio:

SECTION 1. That Change Order No. 8 in the amount of \$2,110.65 and Change Order No. 9 in the amount of \$33,918.61 for the Brecksville Road Reconstruction Project be, and the same hereby are approved.

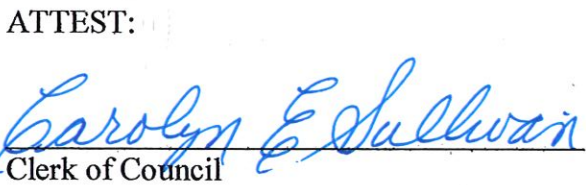
SECTION 2. This Resolution shall take effect and be in force from and after the earliest period allowed by law.

PASSED: 10/18/2005


President of Council


Mayor

Dated: 10/19/05

ATTEST:

Clerk of Council

CHANGE ORDER PROPOSED WORK OR NON-PERFORMANCE IN CONNECTION WITH CONTRACT ITEMS

County: Summit
Project: Brecksville Road Reconstruction
Change Order No.: 8

REF. NO.	ITEM NO.	LOCATION	QUAN.	UNIT	UNIT PRICE	DESCRIPTION	AMOUNT*
X-26	Special	Consolidated Freightways drive Station 1+661.873 Rt	1.000	Lump	679.27	Repair Exist. 12" Conduit under existing driveway	\$679.27
X-27	Special	Station 2+987.436 Lt	1.000	Lump	925.75	Exist. 2-2B Inlet Fabrication	\$925.75
X-28	Special	Sta. 3+032.628 Lt and Sta. 3+049.719 Lt	1.000	Lump	505.63	No. 3 Catch Basin Modifications	\$505.63


Total This Change Order = \$2,110.65

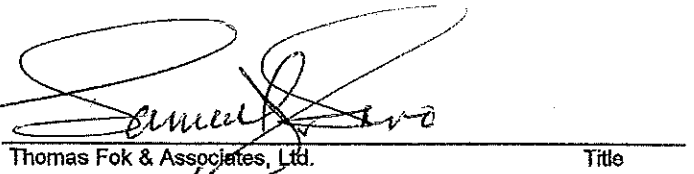
I hereby agree to the additional work and to the non-performance of work as listed above.

*Note: a. - or () denotes non-perform
b. No - or no () denotes extra work

RECOMMENDED BY:

Thomas Fok & Associates, Ltd.


Tom Ferretto 8/3/05
Cioffi & Son Construction Co. Title


Samuel Fok 8/3/05
Thomas Fok & Associates, Ltd. Title

Date

Date

APPROVED BY:

Village of Richfield Title

Date

BRECKSVILLE ROAD RECONSTRUCTION
VILLAGE OF RICHFIELD

Supplemental Information to Support Change Order No. 8

<u>Ref. No.</u>	<u>Comments</u>
X-26	A lump sum of \$679.27 for repair of an existing 12" storm sewer located at driveway DR-15 Sta. 1+661.873 Rt. This existing 12" conduit was encased in the old concrete driveway.
X-27	A lump sum of \$925.75 is for fabricating an existing 2-2B inlet located at Sta. 2+987.927 Lt. The Village requested a new 2-2B inlet to be installed at Sta 3+009.975 Lt and to be tied into the existing 2-2B inlet mentioned above.
X-28	A lump sum of \$505.63 is for re-fabricating catch basin CB-1 at Sta. 3+032.682 Lt and CB-2 at Sta. 3+049.719 Lt. The plan shows the existing conduit to be tied into as 12" but it is actually 15". The contractor had to modify the precast units to accommodate the larger conduit.

CHANGE ORDER PROPOSED WORK OR NON-PERFORMANCE IN CONNECTION WITH CONTRACT ITEMS

County: Summit
Project: Brecksville Road Reconstruction
Change Order No.: 9

REF. NO.	ITEM NO.	LOCATION	QUAN.	UNIT	UNIT PRICE	DESCRIPTION	AMOUNT*
X-29	Special	Supplier - Hughes Supply, Inc.	1.000	Lump	75.00	Restocking Fee for unused conduit (Invoice Attached)	\$75.00
X-30	Special	Full Depth Replacement Area Sta. 2+688.925 to 2+919.925	1.000	Lump	5445.73	Rental and installation costs of 32" Temporary Concrete Barrier Wall	\$5,445.73
X-31	Special	Wheatley Road	1.000	Lump	15496.41	Grading behind curb at north & south sides on Wheatley Road	\$15,496.41
X-32	Special	Wheatley Intersection	1.000	Lump	20373.93	Excavation of Islands at Wheatley Road	\$20,373.93
X-33	Special	Sta. 2+819.491 Lt.	1.000	Lump	584.56	Modification of Catch Basin to install 12" RCP Conduit	\$584.56
X-34	Special	North of Wheatley Road	1.000	Lump	1029.49	Removal of 32" concrete obstruction	\$1,029.49
X-35	Special	Congress Parkway W. Intersection	1.000	Lump	294.00	Difference in Class MS in lieu of Class C	\$294.00
X-36	Special	Sta 2+698 to Sta 2+704	1.000	Lump	779.41	Removing abandoned gas line	\$779.41
X-37	Special	(See attachment for locations)	1.000	Lump	11026.08	Manholes adjusted to grade (T & M)	\$11,026.08
52	604	(See attachment for locations)	-9	Each	2354.00	Manhole Reconstructed to Grade	-\$21,186.00

Total This Change Order = **\$33,918.61**

I hereby agree to the additional work and to the non-performance of work as listed above.


*Note: a. - or () denotes non-perform
b. No - or no () denotes extra work

RECOMMENDED BY:

Thomas Fok & Associates, Ltd.



Cioffi & Son Construction Co. Title



Thomas Fok & Associates, Ltd. Title

Date 9/7/05

Date 9/7/05

APPROVED BY:

Village of Richfield Title

Date

BRECKSVILLE ROAD RECONSTRUCTION
VILLAGE OF RICHFIELD

Supplemental Information to Support Change Order No. 9

<u>Ref. No.</u>	<u>Comments</u>
X-29	A lump sum of \$75.00 for restocking fee to the contractors supplier (Hughes Supply, Inc.). This fee was for unused conduit from this project. Suppliers invoice is attached.
X-30	A lump sum of \$5,445.73 is for rental and installation costs of the 32" Temporary Concrete Barrier Wall used at the Full Depth Pavement Replacement Area from Sta. 2+688.925 to Sta. 2+919.925. This was approved by the Village of Richfield and Thomas Fok & Associates.
X-31	A lump sum of \$15,496.41 is for grading behind the curb at the north & south sides of Wheatley as requested by the Village of Richfield.
X-32	A lump sum of \$20,373.93 is for excavation, grading and placing of top soil on the four islands at the Wheatley intersection. This work was performed as requested by the Village of Richfield.
X-33	A lump sum of \$584.56 is for the modification of the Catch Basin at Sta. 2+819.491 Lt. to tie-in a 12" RCP storm conduit. This work was recommended by Thomas Fok & Associates.
X-34	A lump sum of \$1029.49 is for the removal of a 32" thick concrete obstruction north of Wheatley Road. This obstruction was in the way of the proposed curb. This work was recommended by Thomas Fok & Associates and approved by the Village of Richfield.

- X-35 An agreed lump sum of \$294.00 is the total difference of the cost between Class MS Concrete and Class C Concrete. The difference in cost is \$12.00 per cubic yard. A total of 24.5 cubic yards was used. See attached invoices. Invoices attached.
- X-36 A lump sum cost of \$779.41 is for removing an abandoned Gas Line which was in the way of the proposed run of 300mm Conduit, Type B, 706.02 (D-1) from Sta 2+698.000 to Sta 2+704.000 Lt & Rt. This work was approved by the Village of Richfield.
- X-37 A lump sum cost of \$1225.12 is based on time and materials to adjust nine (9) manholes to grade (See attached for station locations). The Village of Richfield is in agreement with the lump sum amount.
- Ref. 52 **Item 604, Manhole Reconstructed to Grade.**
Nine (9) each manholes were previously payed for at the locations as mentioned in item X-37 above (See attached for station locations). A non-performance of 9 each for this item is being made due to the contractor's time and material submittal. This revises the final quantity of 28 each to 19 each.